

D5PSW SDI Protection Switch

Features

- Dual SDI input protection switch
- 3 SDI outputs
- Low Cost
- Cable EQ to 300 Meters
- Useful as a repeater and/or DA
- Multi color LED status




D5PSW

The D5PSW accepts 2 SDI inputs, Primary and Secondary, and automatically switches to the Secondary input if the Primary input is not present or is not a valid SDI signal. An SDI input is considered valid if a proper SMPTE 259 stream is present. A LED indicator is Green if both Primary and Secondary are present, flashing green if the Primary is present but the Secondary is not present, and Orange if the Secondary is present but the Primary is not. The D5PSW has 3 SDI outputs.

Specifications

Formats: 143, 177, 270, 360 Mb SMPTE 259, auto select
 Inputs: 2 SDI (SMPTE 259M), 2x BNC
 Outputs: 3 SDI (SMPTE 259M), 3x BNC
 Equalizing, Re-Clocking
 Size: 5.1" x 2.4" x 1" (131 x 61 x 25 mm)
 Power: +5V DC regulated power, 4 Watts
 Requires Power Supply

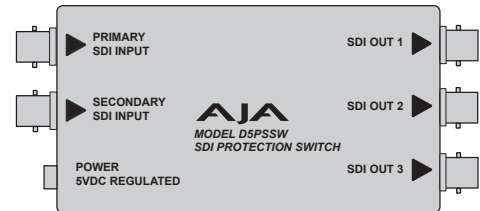

D5PSW

Power Supplies for D- and H-Series Converters

DWP

A new more robust design for 2005, the DWP is a miniature high quality power supply for all of AJA's stand-alone products. Custom manufactured for AJA, the DWP is so small it does not cover the adjacent socket in power strips. With a 2x power over-rating and a molded, latching, circular connector with gold pins, the DWP meets the high reliability requirements of the professional video industry.

Specifications

100-240v, 50/60Hz Universal input
 5 volt regulated output
 10 watt capacity
 Circular, latching output connector with gold pins



DWP-U

The DWP-U is an in-line universal input version which can accept a power cord anywhere in the world.

Specifications

100-240v, 50/60Hz Universal input
 5 volt regulated output



DWP & DWP-U

NEW


RMB and RMB-10 Rack Mounting Brackets for D- and H-series Converters

RMB

One Bracket with Mounting screws

RMB-10

Package of Ten Brackets with Mounting Screws

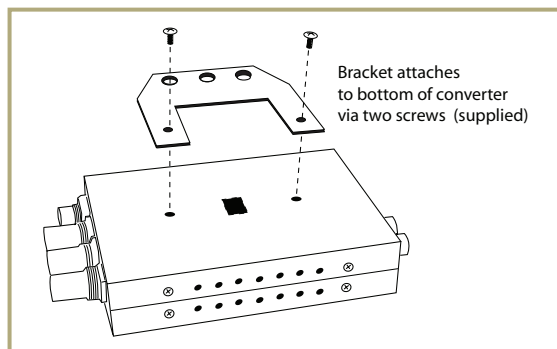

RMB